



Integrated Rear Rewind makes Roll-to-Roll applications easy.



Media Alignment Disks prevent media supply roll from telescoping during operation. (Included)

Rugged Design
Professional Quality
Proven Performance
Economically Priced

APPLICATIONS

- Signs
- Banners
- Trade show displays
- Point-of-purchase
- Dry-erase boards
- Floor graphics
- Graphic mounting
- Photo mounting
- Window graphics
- Vehicle graphics


Warranty:

1 year parts & labor.
Installation is available.

cTUVus
Safety
Approval



Your local dealer is:

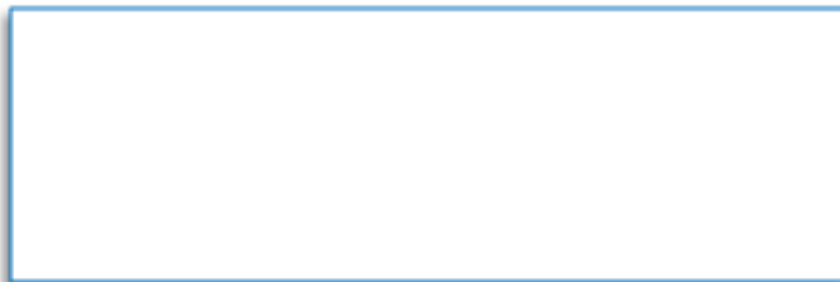

355TH

363TH

Laminating Width	55"	63"
Roller Diameter	5"	
Roller Gap	1"	
Main rollers	Rubber	
Rear Rewind	Integrated	
Maximum temperature	140° F	
Laminating Speed (feet/minute)	20 ft/min	
Unwinds	Top/Bottom	
LinerRewind	ChainDrive	
Pressure Adjustment	Hand Wheel	
Tension Adjustment	Single knob	
Heat method	Metal Alloy heater	
Max. roll diameter	10" OD	
Power Supply	120v 11A	120v 12A
Power Consumption	1320W	1440W
Foot Pedal	Included	
Stand with casters	Included	
Net Weight w/ stand	321 lbs.	376 lbs.
Dimensions	72" x 23.5" x 48.5"	80" x 23" x 48"
Shipping Dimensions	436 lbs. 79" x 26" x 31"	507 lbs. 87" x 26" x 31"